



TS PERFORMANCE

WE ARE DIESEL



MP-8

1110401

MP-8 04.5-up 6.0

Thank you for buying the MP-8 for the 04.5–07 6.0L Light Duty. Here you will learn how to install this MP-8 into your truck, and we guarantee that you will be satisfied with our product. Before you get started check to make sure that you have everything below in the contents that came in the box

Installation Manual

Contents:

MP-8 Module	Harness (TSP01FO)
Switch (TSP100)	Velcro (1)
Zip Ties (2)	

Power increases 0-100HP over stock as you turn the switch clockwise.

Continued



Installation of TS Performance Power Play MP-8 6.0L Powerstroke 04.5-06

Read all instructions and fully understand them before installing your TS Performance MP-8 module. Disconnect the battery terminals and remove keys from ignition before installation. Place Di-Electric Grease onto every electrical connection.

1. Find a proper location for mounting the module. We recommend the canister located directly behind the passenger's side battery or the bracket the MAP Sensor is connected to. Use the supplied Velcro to fasten the MP-8 securely.
2. Route the adjustable switch wire through the firewall to the MP-8. We recommend with an automatic, using the available hole on the upper part of the firewall. Simply poke a hole in the foil and run the wire through it. If your truck is a manual we suggest making a small hole in a rubber boot and run the wire through it. Be careful not to cut any factory wiring. Route the wire away from any moving devices and away from extreme heat that may burn the wire.
3. Locate the ICP Sensor on the passenger's side valve cover. Disconnect the harness and make sure the small key way connector comes out with the factory plug. If it does not, use a small pair of needle nose pliers to remove it and place it on the factory connector. If it remains in the ICP Sensor, you will not be able to plug our connectors to the sensor. Use the supplied connectors and plug into the ICP Sensor and the factory plug.
4. Mount the switch on the inside of the cab. We suggest mounting it just to the right side of the steering column.

If you do not want to drill your dash you can also hang the switch beside the steering column.

If there are any questions on the product or installation of the module give us a

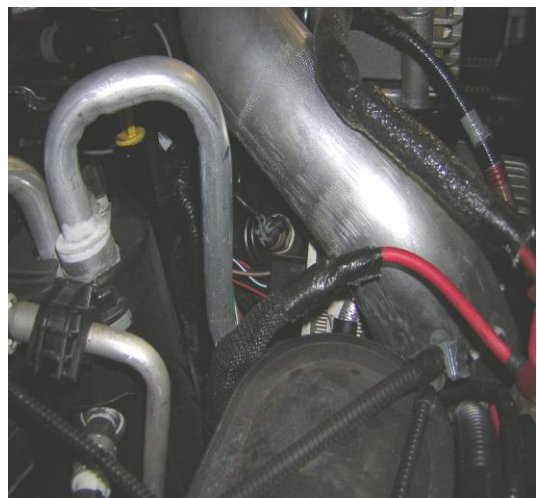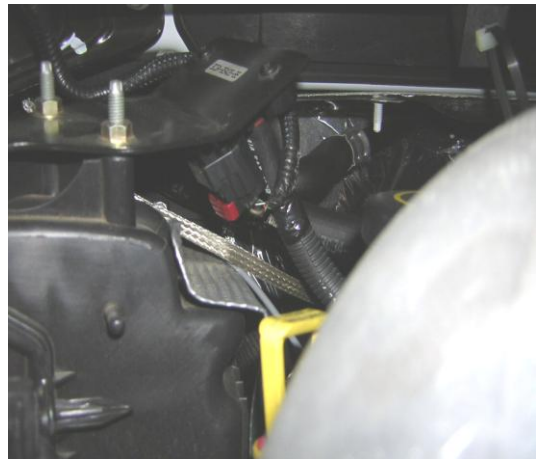

Call at TS Performance (270) 746-9999

Continued



TS Performance
851 Lovers Ln
Bowling Green, KY 42103
270-746-9999
www.tsperformance.com

DISCLAIMER

READ CAREFULLY BEFORE INSTALLING ANY TS PERFORMANCE PRODUCT

REMEMBER THIS IS A HIGH PERFORMANCE PRODUCT. USE AT YOUR OWN RISK. FOR OFF ROAD USE ONLY.

Do not use this product until you have carefully read the following agreement. This agreement sets forth the terms and conditions for the use of the TS Performance product. The installation of this product indicates that the buyer has read and fully understands this agreement and accepts its terms and conditions.

DISCLAIMER OF LIABILITY

TS Performance, its distributors or dealers shall in no way be responsible for the product's proper use and service. The buyer of this system hereby waives all liability claims. The buyer acknowledges that he is not relying on the seller's skill or judgment to select or furnish goods suitable for any particular purpose and that there are no liabilities which extend beyond the description on the face hereof, and the buyer hereby waives all remedies or liabilities, expressed or implied arising by law or otherwise, (including without obligations of the seller with respect to fitness, merchantability and consequential damages) or whether or not occasioned by the seller's negligence.

The seller disclaims any warranty and expressly disclaims any liability for personal injury or damages. The buyer acknowledges and agrees that the disclaimer of any liability for personal injury is a material term for this agreement and the buyer agrees to indemnify the seller and to hold the seller harmless from any claim related to the item of the equipment purchased. Under no circumstances will the seller be liable for any damages or expenses by reason of use or sales of any such equipment.

The seller assumes no liability regarding the improper installation or misapplication of its products. It is the installer's responsibility to check for proper installation and if in doubt the manufacturer is to be contacted.

LIMITED LIFETIME WARRANTY

STATEMENT POLICY

- The warranty policy is the best warranty within the high performance diesel industry.
- All **TS Performance** products have been inspected, tested and trial in the factory laboratories and on the field.
- Nothing in this Statement of Policy shall alter or enlarge the terms of warranties, obligation or liabilities of these products.
- **TS Performance** is not responsible or liable for any products damaged or destroyed due to improper installation.

TERMS OF WARRANTY

- The defective product must be freight prepaid and returned to **TS Performance** for further investigation, otherwise this warranty shall be deemed null and voided and of no effect.
- This warranty is void on any products that show evidence of misapplication, negligence, improper installation, and abuse, lack of proper maintenance or alternation from its original design.
- In no event will **TS Performance** be liable for any consequential or incidental damages for breach of any express or implied warranty on the product.
- This warranty is not transferable or assignable.
- **TS Performance** is not responsible or liable for any products damaged or destroyed due to improper installation.

IN THE EVENT THAT THE BUYER DOES NOT AGREE WITH THIS AGREEMENT: THE BUYER MAY PROMPTLY RETURN THIS PRODUCT IN A NEW AND UNUSED CONDITION WITH A DATED PROOF OF PURCHASE TO THE PLACE OF PURCHASE WITHIN TEN (10) DAYS FROM DATE OF PURCHASE FOR A FULL REFUND.

THE INSTALLATION OF THIS PRODUCT INDICATES THAT THE BUYER HAS READ AND UNDERSTANDS THIS AGREEMENT AND ACCEPTS ITS TERMS AND CONDITIONS.

Continued

TS PERFORMANCE
Products and Other Info found on the
WWW.TSPERFORMANCE.COM

FOR TECHNICAL SUPPORT
(270) 746-9999



WE ARE DIESEL